


DESCRIPTION

CW42-SR is an azole product that provides yellow metal corrosion inhibition using Smart Release[®] Technology.

The formulation is designed to supplement the main corrosion and scale inhibitor in open recirculating systems that contain copper or copper alloys. CW42-SR is ideal for use in cooling towers and closed-loop systems.

BENEFITS

- Smart Release[®] minimizes maintenance costs—no chemical pumps required.
- Smart Release[®] tablet coating prevents human exposure to chemical.
- Proven chemistry containing yellow metal corrosion inhibitor.

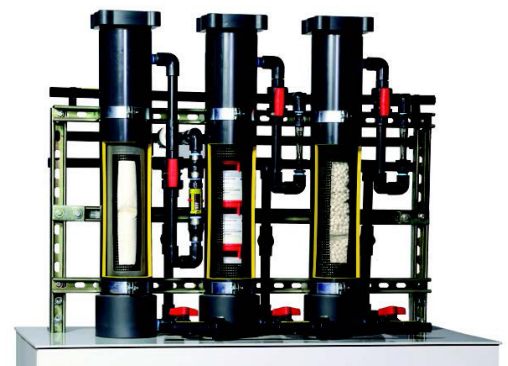

DIRECTIONS FOR USE

CW42-SR is used to supplement copper corrosion inhibitor. To determine if additional azole is needed, first measure the copper residual in the system. CW42-SR is recommended if the azole level in the system is lower than two times of the copper residual. The typical dosage of CW42-SR is at 6ppm as product or one 2.5 lbs bag to treat 50,000 gallons. (to replace the old Direction)

STORAGE & SHELF LIFE

Keep in a cool, dry place. Storage temperature should be 45°F to 95°F. Boxes stored in the appropriate manner are good up to one year.

*Safety data sheets are available at sds.dober.com

APPLICATION

CW42-SR is used in conjunction with the Smart Release[®] feeder system. One 2^{1/2} lb bag of CW42-SR will treat 50,000 gallons of blowdown for 7-15 days. Usage will vary depending upon gallons of blowdown; adjust dosage by adding or removing bags.

Maintain flow through the feeder system between 1-3gpm.

SIMPLE



SAFER



RELIABLE



For additional information contact Dober

630.410.7300 | smartreleaseinfo@smartreleasetechnology.com | www.dober.com

Smart Release Technology is a registered trademark of Dober Chemical Corporation. All Rights Reserved ©v2023

DOBER